




Features of Lithium-Polymer Battery

- **Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- **Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- **Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **Wider Temperature Range:** -20 C~60 C.
- **Superior Safety:** Lithium Polymer chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.
- **Increased Flexibility:** Modular design enables deployment with several batteries both in series and in parallel.

SGS

- MSDS
- UN38.3
- CE
- FCC


Physical Dimension

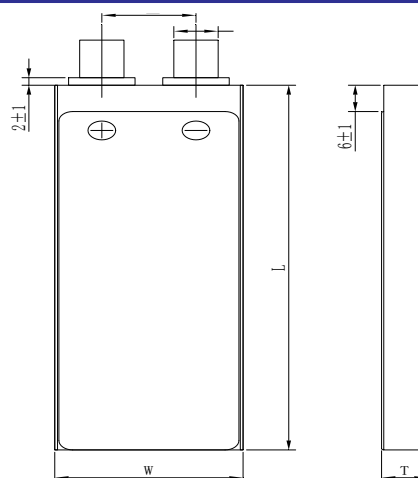


Specification

Electrical Characteristics	Nominal Voltage	3.7V
	Nominal Capacity	6550mAh
	Energy	24.235Wh
	Internal Resistance	≤1.5mΩ
	Cycle Life	>100 cycles @Charge:0.5C,Discharge:15C 80%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1.0C
Standard Charge	Charge Voltage	4.2V
	Charge Mode	0.2C to 4.2V, then 4.2V,charge current to 0.02C ₅ A (CC/CV)
	Charger Current	1.31A
	Max. Charge Current	2.0C ₅ A
	Charge Cut-off Voltage	4.2±0.03V
Standard Discharge	Continuous Current	1.31A
	Max.Discharge Current	15C ₅ A
	Discharge Cut-off Voltage	3.0V
Environmental	Charge Temperature	0°C to 45°C @60±25% Relative Humidity
	Discharge Temperature	-20°C to 60°C @60±25% Relative Humidity
	Storage Temperature	0°C to 40°C @60±25% Relative Humidity
	Water Dust Resistance	/
Mechanical	Dimensions (mm.)	L127.0±0.5*W42.0±0.58*T10.2±0.3mm
	Distance between 2 tabs	21±1mm
	Weight (g.)	Approx:126.0±3.0g


Different Rate Discharge Curve

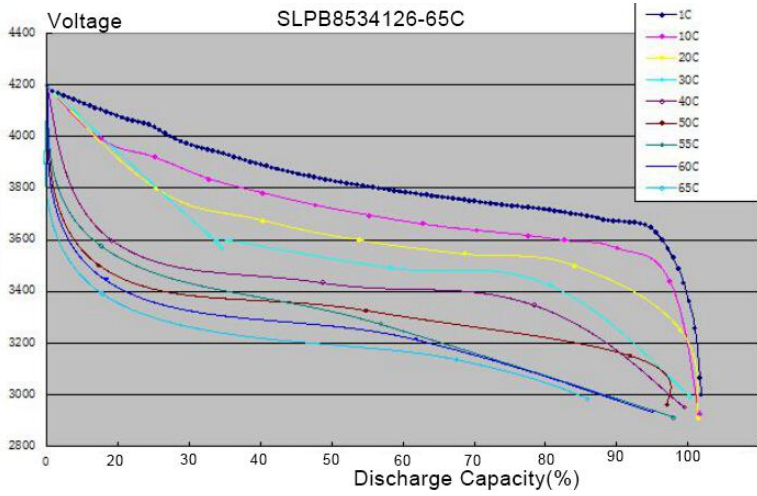

Different Temperature Discharge Curve

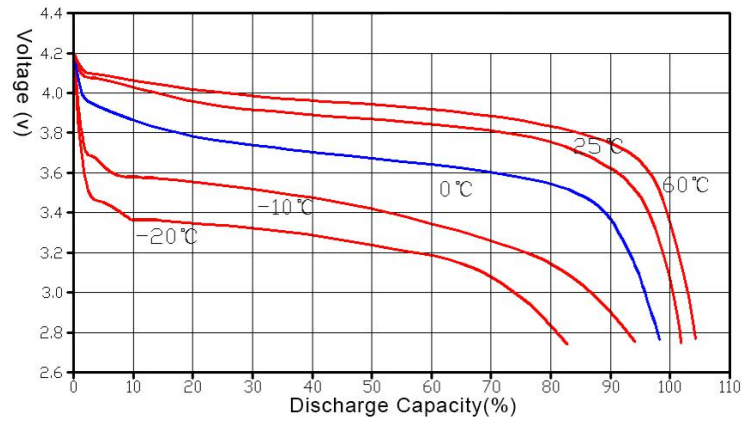

Different Rate Charge Curve

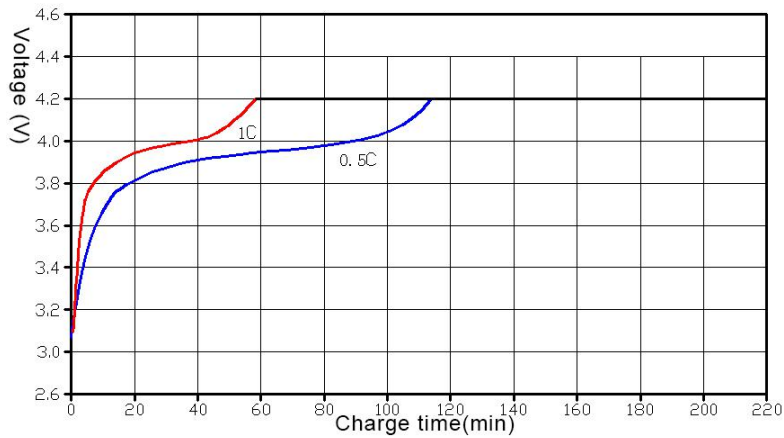

Melasta Battery Co.,Ltd

Sales Office: Hesheng Industrial Zone, Dalang,
BaoAn District, Shenzhen, 518109, China .
Tel: +86-755-83693563 [Http://www.melasta.com](http://www.melasta.com)
Fax: +86-755-28120114 E-mail: sales@melasta.com

Factory Address: Zhongxingbao Industrial Zone, Qinghuan Road,
Qingxi District, Dongguan, 518109, China .